

PROGRAM : NATIONAL DIPLOMA
: ENGINEERING : CIVIL
SUBJECT : **SOIL MECHANICS 2A**
CODE : **CEGA211**
DATE : WINTER EXAMINATION 2016
30 MAY 2016
DURATION : (Y-PAPER) 16:30 – 18:30
WEIGHT : 40 : 60
FULL MARKS : 70
TOTAL MARKS : 70

EXAMINER : MR M SHUPING
MODERATOR : MR F THAIMO 2251A
NUMBER OF PAGES : 3 PAGES AND 2 ANNEXURES

INSTRUCTIONS

ANSWER ALL QUESTIONS.

NON-PROGRAMMABLE SCIENTIFIC CALCULATORS MAY BE USED.
THE USE OF ALPHA-NUMERIC CALCULATORS IS PROHIBITED.

REQUIREMENTS

GRAPH PAPER

QUESTION 1

Describe two (2) problem soils

[6]

QUESTION 2

The dry density of the soil can be expressed in terms of its particle relative density, void ratio and density of water. Working from basic definitions, derive an equation to illustrate this relationship. (18)

Give an equation indicating the relationship between dry density, bulk density and water content. (1)

[19]

QUESTION 3

A sample of saturated clay has a mass of 1524 g and a dry mass of 1052 g. The specific gravity of the solid particles is 2,7. Determine the water content, void ratio, porosity and saturated unit weight.

What would be the water content of this soil if the degree of saturation was 90% at the same void ratio.

[13]

QUESTION 4

The particle size distribution of a soil shows 20% gravel, 40% sand and 10% silt. Using the Figure in Annexure A, determine the textural classification of this soil.

[7]

QUESTION 5

The results of particle size analyses of the soil are shown in a table below. Using the chart in Annexure B, classify this soil according to the Unified Soil Classification System (USCS).

	Sieve Size (mm)	Percentage Passing
$D_{10} = 0,06 \text{ mm}$	4,75	25
$D_{30} = 5,0 \text{ mm}$	2,0	19
$D_{60} = 19,0 \text{ mm}$	0.075	13
Liquid Limit = 25		
Plastic Limit = 12		

[5]

QUESTION 6

The following were obtained from a standard compaction test on a soil to establish its maximum dry density and optimum moisture content:

	Sample 1	Sample2	Sample3	Sample 3	Sample 4
Mass (g)	2010	2092	2114	2100	2055
Water Content (%)	12.8	14,5	15,6	16,8	19,2

The volume of the mould is 1000 cm^3 and the value of G_s is 2,67.

- 6.1 Determine the maximum dry density (in kg/m^3) and optimum moisture content by plotting the moisture-density curve on the graph paper provided. (7)
- 6.2 Calculate the air voids content at the maximum dry density and optimum moisture content. (3)

[10]

QUESTION 7

- 7.1 Name two (2) testing methods commonly used in the field in order to assess the compacted layer's compliance with the project specification. (2)
- 7.2 List four (4) methods by which energy or compactive effort may be applied to a soil layer. (4)
- 7.3 List four (4) advantages of the Dynamic Cone Penetration (DCP) test apparatus. (4)


[10]

TOTAL: 70

ANNEXURE A


TEXTURAL CLASSIFICATION

(Applies to soil passing the 2 mm sieve)

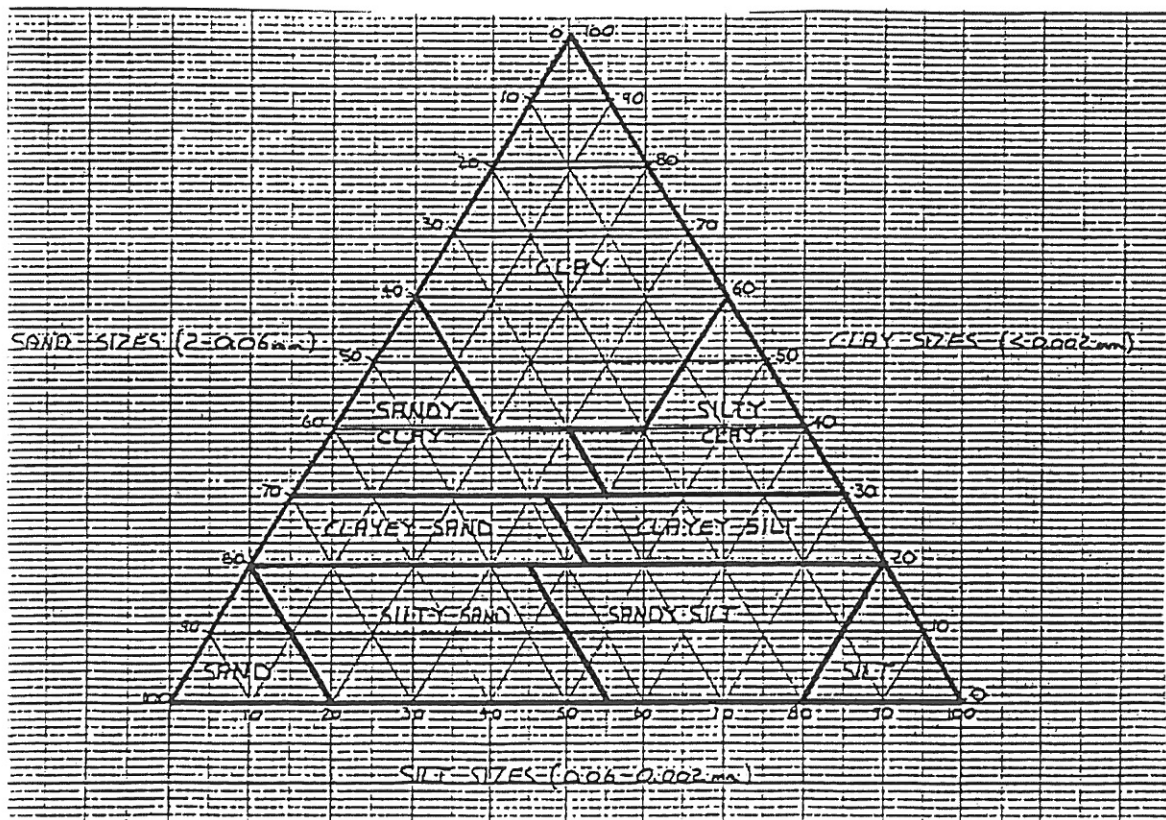

ANNEXURE B

Unified classification system

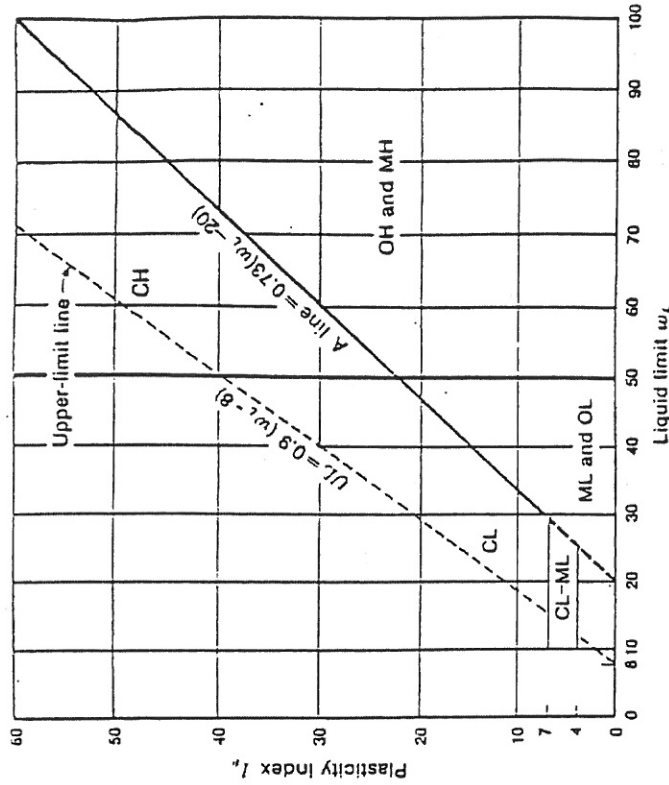

Major divisions	Group symbol	Typical names	Classification criteria for coarse-grained soils	
			$C_u = D_{60}/D_{10} > 4$ $C_c = 1 < D_{30}/D_{10} \times D_{60} < 3$	Not meeting all gradation requirements for GW
Gravels (more than half of coarse fraction is larger than No. 4 sieve size) (more than half of material is larger than No. 200) ($\phi 0.75 \text{ mm}$)	GW	Well-graded gravels, gravel-sand mixtures, little or no fines	Above A line with $4 < I_p < 7$ are borderline cases requiring use of dual symbols	
	GP	Poorly graded gravels, gravel-sand mixtures, little or no fines	Atterberg limits below A line or $I_p < 4$	
	GM	Silty gravels, gravel-sand-silt mixtures	Atterberg limits above A line with $I_p > 7$	
	GC	Clayey gravels, gravel-sand-clay mixtures	$C_u = D_{60}/D_{10} > 6$ $C_c = 1 < D_{30}/D_{10} \times D_{60} < 3$	
Sands (more than half of coarse fraction is smaller than No. 4 sieve size) (more than half of material is larger than No. 200) ($\phi 0.75 \text{ mm}$)	SW	Well-graded sands, gravelly sands, little or no fines	Not meeting all gradation requirements for SW	
	SP	Poorly graded sands, gravelly sands, little or no fines	Atterberg limits below A line or $I_p < 4$	
	SM	Silty sands, sand-silt mixtures	Atterberg limits above A line with $I_p > 7$	
	SC	Clayey sands, sand-clay mixtures	Limits plotting in hatched zone with $4 < I_p < 7$ are borderline cases requiring use of dual symbols	
Fine-grained soils (more than half of material is smaller than No. 200) ($\phi 0.75 \text{ mm}$)	ML	Inorganic silts and very fine sands, rock flour, silty or clayey fine sands, or clayey silts with slight plasticity	1. Determine percentages of sand and gravel from grain-size curve. 2. Depending on percentages of fines (fraction smaller than 200 sieve size), coarse-grained soils are classified as follows: Less than 5%—GW, GP, SW, SP. More than 12%—GM, GC, SM, SC 5 to 12%—Borderline cases requiring dual symbols	
	CL	Inorganic clays of low to medium plasticity, gravelly clays, sandy clays, silty clays, lean clays		
	OL	Organic silts and organic silty clays of low plasticity		
	MH	Inorganic silts, micaceous or diatomaceous fine sandy or silty soils, elastic silts		
Highly plastic (liquid limit > 60)	CH	Inorganic clays of high plasticity, fat clays		
	OH	Organic clays of medium to high plasticity, organic silts		
	Peat	Peat and other highly plastic		