



PROGRAM : NATIONAL DIPLOMA
CIVIL ENGINEERING

SUBJECT : STRUCTURAL ANALYSIS II

CODE : AIS2111

DATE : SUPPLEMENTARY EXAMINATION 2016
29 JULY 2016

DURATION : (X-PAPER) 08:00 - 11:00

WEIGHT : 40 : 60

TOTAL MARKS : 100

EXAMINER : MR F THAIMO

MODERATOR : MR C BRUWER

NUMBER OF PAGES : 4 PAGES

INSTRUCTIONS : SCIENTIFIC POCKET CALCULATOR MAY BE USED

REQUIREMENTS : 2 SHEETS OF A4 GRAPH PAPER PER CANDIDATE.

INSTRUCTIONS TO CANDIDATES:

PLEASE ANSWER ALL THE QUESTIONS.

QUESTION 1

The statically determinate frame **ABCD**, Figure 1 below, is pinned at both supports A and D, and is connected by a frictionless pin at C. The frame is subjected to loading as shown on the Figure.

- 1.1 Determine the support reactions at A and D and sketch a free body diagram of the frame showing all the loads and reactions.
- 1.2 Draw the Shear Force, Bending Moment and Axial Force Diagrams for the frame on the graph paper provided. **Note:** bending moment is to be drawn on the side of the member where it causes tension.

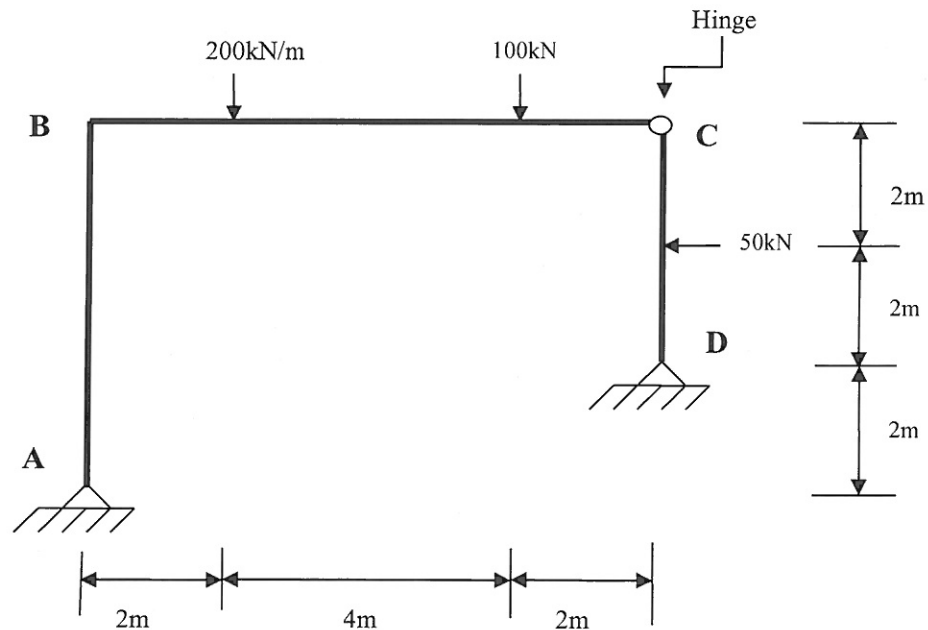


FIGURE 1

QUESTION 2

A beam with both ends fixed is shown in Figure 2 below. The beam is subjected to a point load at 2m from support A and a UDL as shown on the Figure. The EI value for the beam section is constant.

Using **MOMENT-AREA** theory, determine the reactant bending moments at the supports A and B.

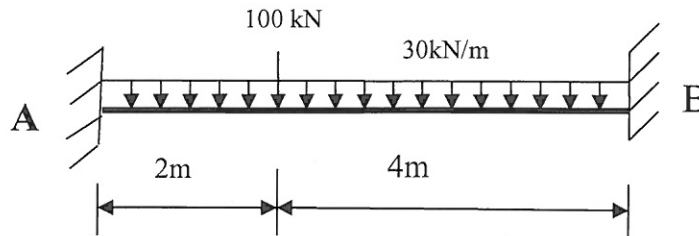
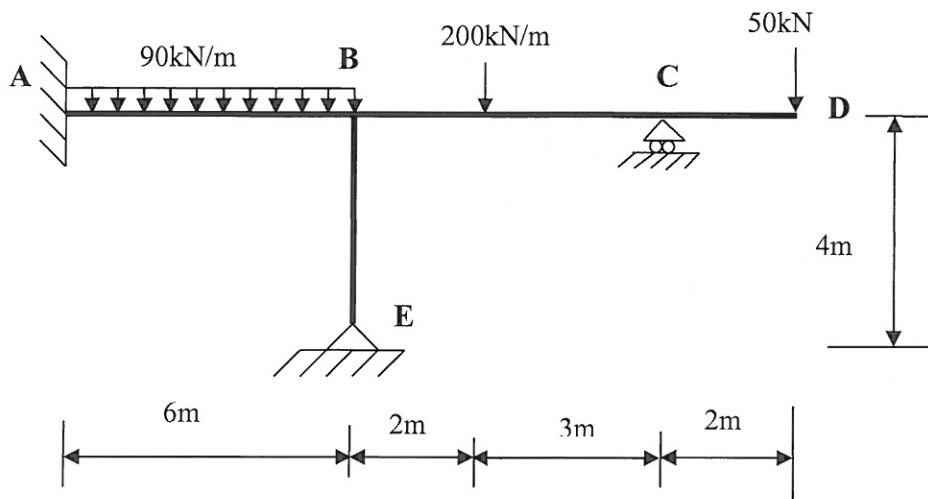
**FIGURE 2****[20]****QUESTION 3**

Figure 3 below shows a framed ABCDE which is fixed at A, pinned at E and rests on rollers at C. EI is constant. The frame is subjected to different loading as shown in Figure 3.

Using the **SLOPE DEFLECTION** method, analyze the frame and draw the Shear Force, Bending Moment and Axial Force diagrams for the frame on the graph paper provided.

The slope deflection equations are as follows:

$$M_{AB} = \frac{2EI}{l} \left[2\theta_A + \theta_B - \frac{3(\Delta_B - \Delta_A)}{l} \right] \quad M_{BA} = \frac{2EI}{l} \left[\theta_A + 2\theta_B - \frac{3(\Delta_B - \Delta_A)}{l} \right]$$

**FIGURE 3****[30]**

QUESTION 4

A steel section is to be used as a column. The column is to be fixed at one end and pinned at the other for bending about both X-X and Y-Y axis.

The properties of the section are as follows:

A	=	3.490x10 ³ mm ²
I _{xx}	=	24.49x10 ⁶ mm ⁴
I _{yy}	=	3.290x10 ⁶ mm ⁴
E	=	210 GPa
σ _y	=	250 MPa

- 4.1 Calculate the Euler buckling stress and the corresponding load.
- 4.2 If Perry-Robertson equation is used, what would be the stress at failure and the force to produce this stress?

Perry-Robertson equation is as follows:

$$\sigma_c = \frac{1}{2} [\sigma_y + (1 + \eta) \sigma_e] - \sqrt{\left\{ \frac{1}{4} [\sigma_y + (1 + \eta) \sigma_e]^2 - \sigma_y \sigma_e \right\}}$$

[25]

Total: 100